

Aggregate Optimization Chart

PLANT #: **P-101**

Sample Date: 9/18/23

Concrete Grade: **P1M, 3500HP**

Dates Test Represents: 9/19/2023 through 9/25/2023

Contractor: _____

MDOT No.: _____

Agg. Class	Pit #	Source	Weight (SSD)	ft ³	Specific Gravity	% Contribution
CA	71-47	Presque Isle	1070	6.54	2.62	34.9
IA	71-47	Presque Isle	800	4.89	2.62	26.1
2NS	75-051	Mid Michigan	1200	7.23	2.66	39.1
Total Wt			3070	18.67		100.0

<---- Verify this number is 100%



Superior Materials, LLC
 30701 W. 10 Mile Rd.
 Suite 500
 Farmington Hills, MI 48336

Sieve	CA	IA	2NS	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	100.0	100.0	100.0	0.0	0.0
1.5"	94.8	100.0	100.0	98.2	1.8	1.8
1"	34.4	100.0	100.0	77.1	21.1	22.9
3/4"	10.8	98.5	100.0	68.5	8.6	31.5
1/2"	3.9	83.2	100.0	62.1	6.4	37.9
3/8"	3.4	63.7	100.0	56.9	5.3	43.1
#4	3.0	17.3	96.4	43.2	13.6	56.8
#8	2.8	4.5	80.6	33.7	9.6	66.3
#16	2.7	2.7	66.2	27.5	6.1	72.5
#30	2.6	2.3	51.2	21.5	6.0	78.5
#50	2.5	2.1	24.1	10.8	10.7	89.2
#100	2.2	1.9	7.4	4.2	6.7	95.8
LBW	1.8	1.7	0.9	1.4	2.7	98.6

*Maximum % Retained must be above the 3/8" sieve.
 *Any two adjacent sieves must equal 10% except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 4% for each sieve except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 8% for the 1" sieve when a 2" max. size (nom. Max. 1.5") aggregate is used.


Production Gradation Batch Plant Gradations Aggregate Supplier Gradations

Coarseness Factor:	65	Workability Factor:	34
---------------------------	-----------	----------------------------	-----------

Initial Production Sample (IPS)

Coarseness Factor:	66
Workability Factor:	35

Sieve	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	0.0	0.0
1.5"	99.6	0.4	0.4
1"	84.3	15.3	15.7
3/4"	74.8	9.6	25.2
1/2"	64.3	10.4	35.7
3/8"	56.8	7.5	43.2
#4	43.0	13.8	57.0
#8	34.9	8.1	65.1
#16	26.4	8.5	73.6
#30	19.9	6.5	80.1
#50	10.4	9.5	89.6
#100	3.4	7.0	96.6
LBW	1.2	2.2	98.8

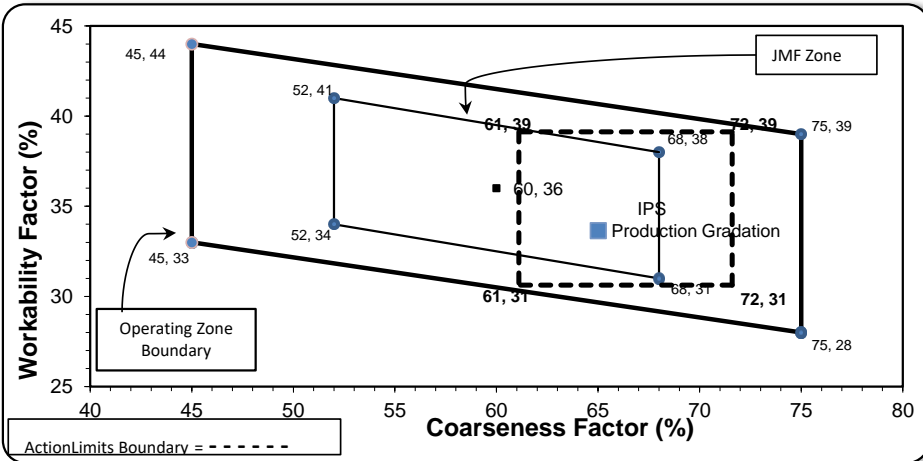

PREPARED BY:
 SM, LLC Technical Service

Approved By:

Aggregate Optimization Chart

PLANT #: **P-102**

Sample Date: 9/18/23

Concrete Grade: **P1M, 3500HP**

Dates Test Represents: 9/19/2023 through 9/25/2023

Contractor: _____

MDOT No.: _____

Agg. Class	Pit #	Source	Weight (SSD)	ft ³	Specific Gravity	% Contribution
CA	58-003	Stoneco	1370	8.16	2.69	43.9
IA	58-003	Stoneco	550	3.28	2.69	17.6
2NS	81-019	Pleasant Lake	1200	7.26	2.65	38.5
Total Wt			3120	18.70		100.0

<----- Verify this number is 100%




Superior Materials, LLC
 30701 W. 10 Mile Rd.
 Suite 500
 Farmington Hills, MI 48336

Sieve	CA	IA	2NS	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	100.0	100.0	100.0	0.0	0.0
1.5"	100.0	100.0	100.0	100.0	0.0	0.0
1"	65.5	100.0	100.0	84.9	15.1	15.1
3/4"	44.4	100.0	100.0	75.6	9.3	24.4
1/2"	16.8	86.5	100.0	61.1	14.5	38.9
3/8"	11.3	74.2	100.0	56.5	4.6	43.5
#4	3.1	16.5	97.9	41.9	14.6	58.1
#8	2.0	4.9	83.0	33.7	8.3	66.3
#16	1.8	2.7	66.4	26.8	6.9	73.2
#30	1.7	2.0	47.2	19.3	7.6	80.7
#50	1.6	1.8	23.2	9.9	9.3	90.1
#100	1.6	1.7	4.4	2.7	7.2	97.3
LBW	1.3	1.4	0.4	1.0	1.7	99.0

*Maximum % Retained must be above the 3/8" sieve.
 *Any two adjacent sieves must equal 10% except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 4% for each sieve except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 8% for the 1" sieve when a 2" max. size (nom. Max. 1.5") aggregate is used.

Production Gradation Batch Plant Gradations Aggregate Supplier Gradations

Coarseness Factor:	66	Workability Factor:	34
---------------------------	-----------	----------------------------	-----------

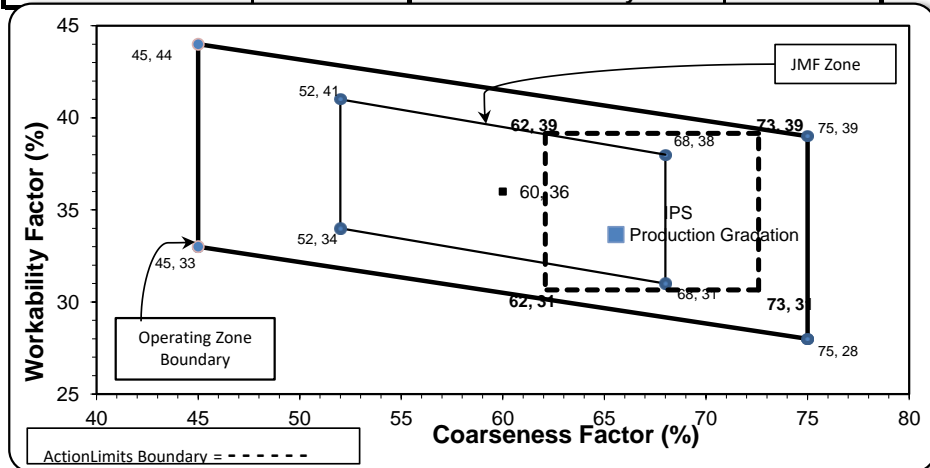

Initial Production Sample (IPS)

Coarseness Factor:	67
Workability Factor:	35

Sieve	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	0.0	0.0
1.5"	100.0	0.0	0.0
1"	85.5	14.5	14.5
3/4"	73.4	12.1	26.6
1/2"	61.0	12.4	39.0
3/8"	56.2	4.8	43.8
#4	43.1	13.1	56.9
#8	34.9	8.2	65.1
#16	29.4	5.5	70.6
#30	21.6	7.8	78.4
#50	8.1	13.4	91.9
#100	2.2	5.9	97.8
LBW	1.4	0.8	98.6

PREPARED BY:
 SM, LLC Technical Service

Approved By:

Aggregate Optimization Chart

PLANT #: **P-103**

Sample Date: 9/18/23

Concrete Grade: **P1M, 3500HP**

Dates Test Represents: 9/19/2023 through 9/25/2023

Contractor: _____

MDOT No.: _____

Agg. Class	Pit #	Source	Weight (SSD)	ft ³	Specific Gravity	% Contribution
CA	58-003	Stoneco	1370	8.16	2.69	43.9
IA	58-003	Stoneco	550	3.28	2.69	17.6
2NS	81-019	Pleasant Lake	1200	7.26	2.65	38.5
Total Wt			3120	18.70		100.0

<----- Verify this number is 100%




Superior Materials, LLC
 30701 W. 10 Mile Rd.
 Suite 500
 Farmington Hills, MI 48336

Sieve	CA	IA	2NS	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	100.0	100.0	100.0	0.0	0.0
1.5"	100.0	100.0	100.0	100.0	0.0	0.0
1"	65.5	100.0	100.0	84.9	15.1	15.1
3/4"	44.4	100.0	100.0	75.6	9.3	24.4
1/2"	16.8	86.5	100.0	61.1	14.5	38.9
3/8"	11.3	74.2	100.0	56.5	4.6	43.5
#4	3.1	16.5	97.9	41.9	14.6	58.1
#8	2.0	4.9	83.0	33.7	8.3	66.3
#16	1.8	2.7	66.4	26.8	6.9	73.2
#30	1.7	2.0	47.2	19.3	7.6	80.7
#50	1.6	1.8	23.2	9.9	9.3	90.1
#100	1.6	1.7	4.4	2.7	7.2	97.3
LBW	1.3	1.4	0.4	1.0	1.7	99.0

*Maximum % Retained must be above the 3/8" sieve.
 *Any two adjacent sieves must equal 10% except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 4% for each sieve except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 8% for the 1" sieve when a 2" max. size (nom. Max. 1.5") aggregate is used.

Production Gradation Batch Plant Gradations Aggregate Supplier Gradations

Coarseness Factor:	66	Workability Factor:	34
---------------------------	-----------	----------------------------	-----------

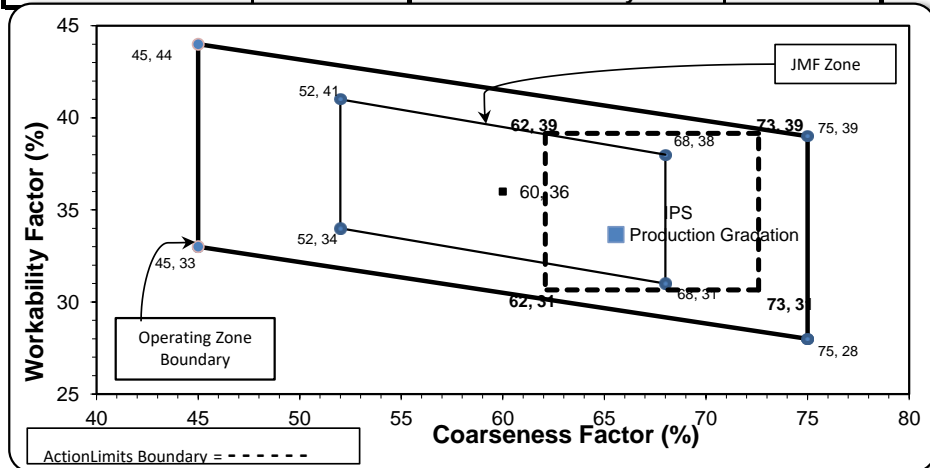

Initial Production Sample (IPS)

Coarseness Factor:	67		
Workability Factor:	35		
Sieve	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	0.0	0.0
1.5"	100.0	0.0	0.0
1"	85.5	14.5	14.5
3/4"	73.4	12.1	26.6
1/2"	61.0	12.4	39.0
3/8"	56.2	4.8	43.8
#4	43.1	13.1	56.9
#8	34.9	8.2	65.1
#16	29.4	5.5	70.6
#30	21.6	7.8	78.4
#50	8.1	13.4	91.9
#100	2.2	5.9	97.8
LBW	1.4	0.8	98.6

PREPARED BY:
 SM, LLC Technical Service

Approved BY:

Aggregate Optimization Chart

PLANT #: 14

Sample Date: 9/18/23

Concrete Grade: **P1M, 3500HP**

Dates Test Represents: 9/19/2023 through 9/25/2023

Contractor: _____

MDOT No.: _____

Agg. Class	Pit #	Source	Weight (SSD)	ft ³	Specific Gravity	% Contribution
CA	58-003	Stoneco	1370	8.16	2.69	43.9
IA	58-003	Stoneco	550	3.28	2.69	17.6
2NS	19-04	Schlegel	1200	7.20	2.67	38.5
Total Wt			3120	18.64		100.0

<----- Verify this number is 100%




Builders Redi-Mix
 30701 W. 10 Mile Rd.
 Suite 500
 Farmington Hills, MI 48336

Sieve	CA	IA	2NS	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	100.0	100.0	100.0	0.0	0.0
1.5"	100.0	100.0	100.0	100.0	0.0	0.0
1"	65.5	100.0	100.0	84.9	15.1	15.1
3/4"	44.4	100.0	100.0	75.6	9.3	24.4
1/2"	16.8	86.5	100.0	61.1	14.5	38.9
3/8"	11.3	74.2	100.0	56.5	4.6	43.5
#4	3.1	16.5	99.9	42.7	13.8	57.3
#8	2.0	4.9	90.1	36.4	6.3	63.6
#16	1.8	2.7	69.4	28.0	8.4	72.0
#30	1.7	2.0	44.5	18.2	9.7	81.8
#50	1.6	1.8	14.3	6.5	11.7	93.5
#100	1.6	1.7	2.7	2.0	4.5	98.0
LBW	1.3	1.4	0.2	0.9	1.1	99.1

*Maximum % Retained must be above the 3/8" sieve.
 *Any two adjacent sieves must equal 10% except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 4% for each sieve except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 8% for the 1" sieve when a 2" max. size (nom. Max. 1.5") aggregate is used.

Production Gradation Batch Plant Gradations Aggregate Supplier Gradations

Coarseness Factor:	68	Workability Factor:	36
---------------------------	-----------	----------------------------	-----------

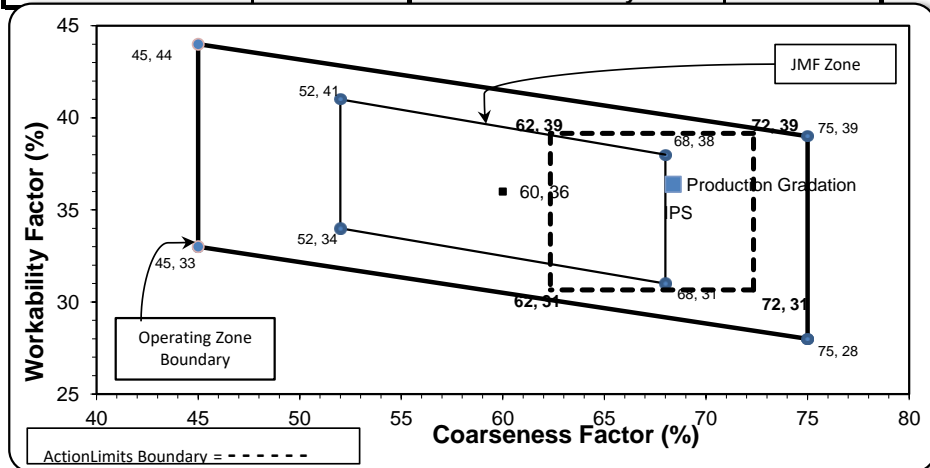

Initial Production Sample (IPS)

Coarseness Factor:	67		
Workability Factor:	35		
Sieve	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	0.0	0.0
1.5"	100.0	0.0	0.0
1"	85.5	14.5	14.5
3/4"	73.4	12.1	26.6
1/2"	61.0	12.4	39.0
3/8"	56.2	4.8	43.8
#4	43.1	13.1	56.9
#8	34.9	8.2	65.1
#16	29.4	5.5	70.6
#30	21.6	7.8	78.4
#50	8.1	13.4	91.9
#100	2.2	5.9	97.8
LBW	1.4	0.8	98.6

PREPARED BY:
 SM, LLC Technical Service

Approved By:

Aggregate Optimization Chart

PLANT #: 12

Sample Date: 9/18/23

Concrete Grade: **P1M, 3500HP**

Dates Test Represents: 9/19/2023 through 9/25/2023

Contractor: _____

MDOT No.: _____

Agg. Class	Pit #	Source	Weight (SSD)	ft ³	Specific Gravity	% Contribution
CA	71-47	Presque Isle	870	5.32	2.62	28.3
IA	71-47	Presque Isle	1000	6.12	2.62	32.6
2NS	63-115	Ray Rd	1200	7.26	2.65	39.1
Total Wt			3070	18.70		100.0

<----- Verify this number is 100%




Superior Materials, LLC
 30701 W. 10 Mile Rd.
 Suite 500
 Farmington Hills, MI 48336

Sieve	CA	IA	2NS	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	100.0	100.0	100.0	0.0	0.0
1.5"	92.8	100.0	100.0	98.0	2.0	2.0
1"	41.0	100.0	100.0	83.3	14.7	16.7
3/4"	8.9	98.0	100.0	73.5	9.7	26.5
1/2"	2.3	74.8	100.0	64.1	9.4	35.9
3/8"	2.2	49.8	100.0	55.9	8.2	44.1
#4	2.1	11.0	96.0	41.7	14.2	58.3
#8	2.0	3.7	80.9	33.4	8.3	66.6
#16	1.9	3.1	65.9	27.3	6.1	72.7
#30	1.8	3.0	49.5	20.8	6.5	79.2
#50	1.8	2.9	25.5	11.4	9.4	88.6
#100	1.6	2.8	5.4	3.5	7.9	96.5
LBW	1.2	2.4	0.6	1.4	2.1	98.6

*Maximum % Retained must be above the 3/8" sieve.
 *Any two adjacent sieves must equal 10% except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 4% for each sieve except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 8% for the 1" sieve when a 2" max. size (nom. Max. 1.5") aggregate is used.

Production Gradation Batch Plant Gradations Aggregate Supplier Gradations

Coarseness Factor: 66 **Workability Factor:** 33

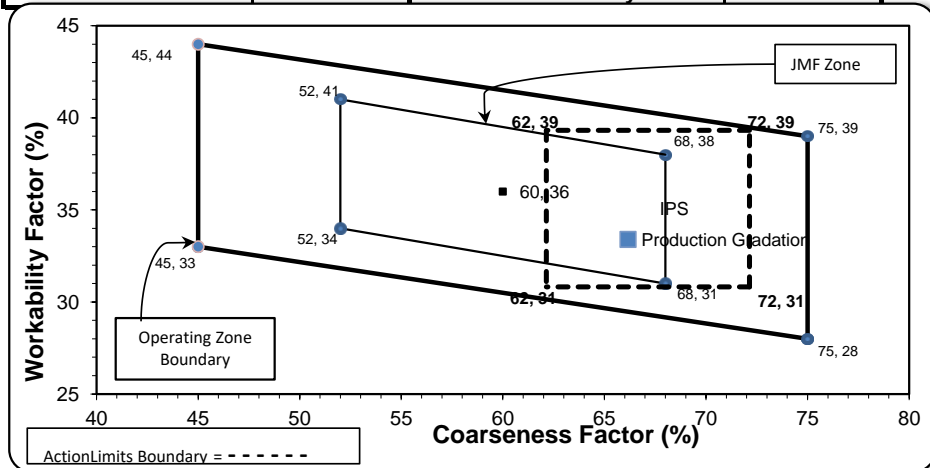

Initial Production Sample (IPS)

Coarseness Factor: 67
Workability Factor: 35

Sieve	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	0.0	0.0
1.5"	99.6	0.4	0.4
1"	83.9	15.7	16.1
3/4"	74.0	9.8	26.0
1/2"	63.7	10.3	36.3
3/8"	56.4	7.3	43.6
#4	43.0	13.4	57.0
#8	35.1	7.9	64.9
#16	29.0	6.1	71.0
#30	20.9	8.0	79.1
#50	8.1	12.8	91.9
#100	1.6	6.5	98.4
LBW	0.9	0.8	99.1

PREPARED BY:
 SM, LLC Technical Service

Approved By:

Aggregate Optimization Chart

PLANT #: 20

Sample Date: 9/18/23

Concrete Grade: **P1M, 3500HP**

Dates Test Represents: 9/19/2023 through 9/25/2023

Contractor: _____

MDOT No.: _____

Agg. Class	Pit #	Source	Weight (SSD)	ft ³	Specific Gravity	% Contribution
CA	71-47	Presque Isle	970	5.93	2.62	31.6
IA	71-47	Presque Isle	900	5.50	2.62	29.3
2NS	63-92	Grange Hall	1200	7.26	2.65	39.1
Total Wt			3070	18.70		100.0

<----- Verify this number is 100%




Superior Materials, LLC
 30701 W. 10 Mile Rd.
 Suite 500
 Farmington Hills, MI 48336

Sieve	CA	IA	2NS	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	100.0	100.0	100.0	0.0	0.0
1.5"	96.3	100.0	100.0	98.8	1.2	1.2
1"	42.7	100.0	100.0	81.9	16.9	18.1
3/4"	10.3	98.2	100.0	71.1	10.8	28.9
1/2"	3.5	83.0	100.0	64.5	6.6	35.5
3/8"	2.7	62.9	100.0	58.4	6.1	41.6
#4	2.2	15.2	97.2	43.1	15.2	56.9
#8	2.0	2.7	82.6	33.7	9.4	66.3
#16	1.9	2.1	67.9	27.8	6.0	72.2
#30	1.9	2.0	49.3	20.5	7.3	79.5
#50	1.8	1.8	20.4	9.1	11.4	90.9
#100	1.7	1.7	3.4	2.4	6.7	97.6
LBW	1.5	1.5	0.8	1.2	1.1	98.8

*Maximum % Retained must be above the 3/8" sieve.
 *Any two adjacent sieves must equal 10% except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 4% for each sieve except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 8% for the 1" sieve when a 2" max. size (nom. Max. 1.5") aggregate is used.

Production Gradation Batch Plant Gradations Aggregate Supplier Gradations

Coarseness Factor:	63	Workability Factor:	34
---------------------------	-----------	----------------------------	-----------

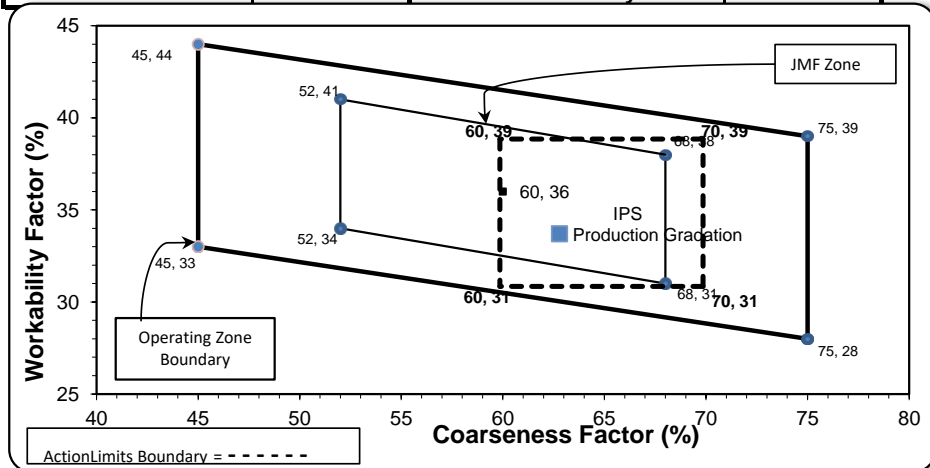

Initial Production Sample (IPS)

Coarseness Factor:	65
Workability Factor:	35

Sieve	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	0.0	0.0
1.5"	99.1	0.9	0.9
1"	80.8	18.2	19.2
3/4"	71.3	9.6	28.7
1/2"	64.0	7.3	36.0
3/8"	57.7	6.2	42.3
#4	42.8	15.0	57.2
#8	34.8	7.9	65.2
#16	28.4	6.4	71.6
#30	20.2	8.2	79.8
#50	7.6	12.6	92.4
#100	1.6	6.0	98.4
LBW	1.0	0.6	99.0

PREPARED BY:
 SM, LLC Technical Service

Approved By:

Aggregate Optimization Chart

PLANT #: P11

Sample Date: 9/18/23

Concrete Grade: P1M, 3500HP

Dates Test Represents: 9/19/2023 through 9/25/2023

Contractor: _____

MDOT No.: _____

Agg. Class	Pit #	Source	Weight (SSD)	ft ³	Specific Gravity	% Contribution
CA	71-47	Presque Isle	870	5.32	2.62	28.3
IA	71-47	Presque Isle	1000	6.12	2.62	32.6
2NS	95-013	Smelter Bay	1200	7.26	2.65	39.1
Total Wt			3070	18.70		100.0

<----- Verify this number is 100%




Superior Materials, LLC
 30701 W. 10 Mile Rd.
 Suite 500
 Farmington Hills, MI 48336

Sieve	CA	IA	2NS	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	100.0	100.0	100.0	0.0	0.0
1.5"	92.8	100.0	100.0	98.0	2.0	2.0
1"	41.0	100.0	100.0	83.3	14.7	16.7
3/4"	8.9	98.0	100.0	73.5	9.7	26.5
1/2"	2.3	74.8	100.0	64.1	9.4	35.9
3/8"	2.2	49.8	100.0	55.9	8.2	44.1
#4	2.1	11.0	97.2	42.2	13.8	57.8
#8	2.0	3.7	85.4	35.2	7.0	64.8
#16	1.9	3.1	69.9	28.9	6.3	71.1
#30	1.8	3.0	50.3	21.1	7.7	78.9
#50	1.8	2.9	24.6	11.1	10.1	88.9
#100	1.6	2.8	7.2	4.2	6.9	95.8
LBW	1.2	2.4	0.9	1.5	2.7	98.5

*Maximum % Retained must be above the 3/8" sieve.
 *Any two adjacent sieves must equal 10% except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 4% for each sieve except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 8% for the 1" sieve when a 2" max. size (nom. Max. 1.5") aggregate is used.

Production Gradation Batch Plant Gradations Aggregate Supplier Gradations

Coarseness Factor: 68 **Workability Factor:** 35

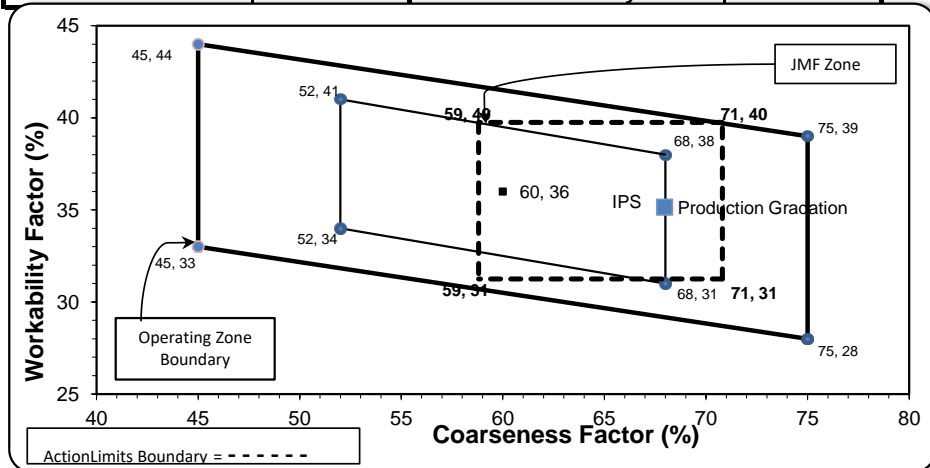

Initial Production Sample (IPS)

Coarseness Factor: 65
Workability Factor: 36

Sieve	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	0.0	0.0
1.5"	99.0	0.6	0.6
1"	84.0	15.3	16.0
3/4"	73.5	10.5	26.5
1/2"	65.2	8.2	34.8
3/8"	58.2	7.1	41.8
#4	44.1	14.1	55.9
#8	35.5	8.6	64.5
#16	29.1	6.4	70.9
#30	21.9	7.3	78.1
#50	9.6	12.2	90.4
#100	2.6	7.1	97.4
LBW	1.0	1.6	99.0

PREPARED BY:
 SM, LLC Technical Service

Approved By:

Aggregate Optimization Chart

PLANT #: **P-32**

Sample Date: 9/18/23

Concrete Grade: **P1M, 3500HP**

Dates Test Represents: 9/19/2023 through 9/25/2023

Contractor: _____

MDOT No.: _____

Agg. Class	Pit #	Source	Weight (SSD)	ft ³	Specific Gravity	% Contribution
CA	71-47	Presque Isle	870	5.32	2.62	28.3
IA	71-47	Presque Isle	1000	6.12	2.62	32.6
2NS	95-013	Smelter Bay	1200	7.26	2.65	39.1
Total Wt			3070	18.70		100.0

<----- Verify this number is 100%




Superior Materials, LLC
 30701 W. 10 Mile Rd.
 Suite 500
 Farmington Hills, MI 48336

Sieve	CA	IA	2NS	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	100.0	100.0	100.0	0.0	0.0
1.5"	92.8	100.0	100.0	98.0	2.0	2.0
1"	41.0	100.0	100.0	83.3	14.7	16.7
3/4"	8.9	98.0	100.0	73.5	9.7	26.5
1/2"	2.3	74.8	100.0	64.1	9.4	35.9
3/8"	2.2	49.8	100.0	55.9	8.2	44.1
#4	2.1	11.0	97.2	42.2	13.8	57.8
#8	2.0	3.7	85.4	35.2	7.0	64.8
#16	1.9	3.1	69.9	28.9	6.3	71.1
#30	1.8	3.0	50.3	21.1	7.7	78.9
#50	1.8	2.9	24.6	11.1	10.1	88.9
#100	1.6	2.8	7.2	4.2	6.9	95.8
LBW	1.2	2.4	0.9	1.5	2.7	98.5

*Maximum % Retained must be above the 3/8" sieve.
 *Any two adjacent sieves must equal 10% except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 4% for each sieve except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 8% for the 1" sieve when a 2" max. size (nom. Max. 1.5") aggregate is used.

Production Gradation Batch Plant Gradations Aggregate Supplier Gradations

Coarseness Factor: **68** **Workability Factor:** **35**

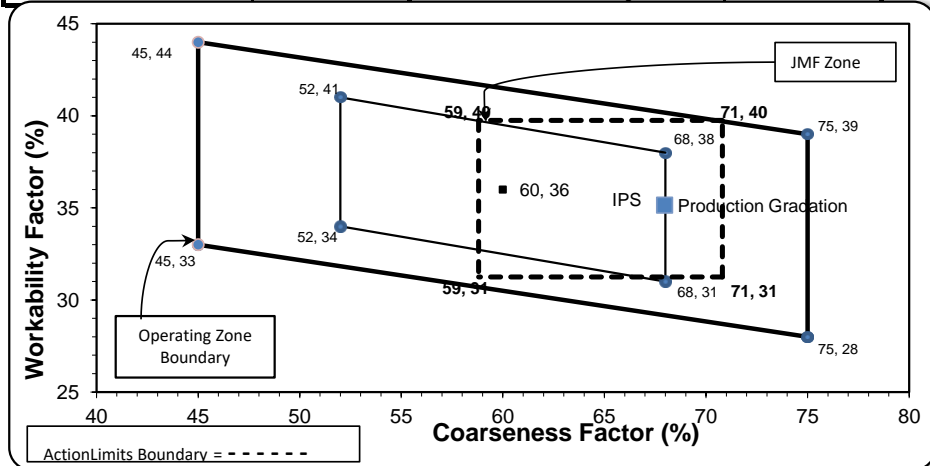

Initial Production Sample (IPS)

Coarseness Factor: **65**
Workability Factor: **36**

Sieve	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	0.0	0.0
1.5"	99.0	0.6	0.6
1"	84.0	15.3	16.0
3/4"	73.5	10.5	26.5
1/2"	65.2	8.2	34.8
3/8"	58.2	7.1	41.8
#4	44.1	14.1	55.9
#8	35.5	8.6	64.5
#16	29.1	6.4	70.9
#30	21.9	7.3	78.1
#50	9.6	12.2	90.4
#100	2.6	7.1	97.4
LBW	1.0	1.6	99.0

PREPARED BY:
 SM, LLC Technical Service

Approved By:

Aggregate Optimization Chart

PLANT #: **P-35**

Sample Date: 9/18/23

Concrete Grade: **P1M, 3500HP**

Dates Test Represents: 9/19/2023 through 9/25/2023

Contractor: _____

MDOT No.: _____

Agg. Class	Pit #	Source	Weight (SSD)	ft ³	Specific Gravity	% Contribution
CA	58-003	Stoneco	1370	8.16	2.69	43.9
IA	58-003	Stoneco	550	3.28	2.69	17.6
2NS	81-019	Pleasant Lake	1200	7.26	2.65	38.5
Total Wt			3120	18.70		100.0

<----- Verify this number is 100%




Superior Materials, LLC
 30701 W. 10 Mile Rd.
 Suite 500
 Farmington Hills, MI 48336

Sieve	CA	IA	2NS	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	100.0	100.0	100.0	0.0	0.0
1.5"	100.0	100.0	100.0	100.0	0.0	0.0
1"	65.5	100.0	100.0	84.9	15.1	15.1
3/4"	44.4	100.0	100.0	75.6	9.3	24.4
1/2"	16.8	86.5	100.0	61.1	14.5	38.9
3/8"	11.3	74.2	100.0	56.5	4.6	43.5
#4	3.1	16.5	97.9	41.9	14.6	58.1
#8	2.0	4.9	83.0	33.7	8.3	66.3
#16	1.8	2.7	66.4	26.8	6.9	73.2
#30	1.7	2.0	47.2	19.3	7.6	80.7
#50	1.6	1.8	23.2	9.9	9.3	90.1
#100	1.6	1.7	4.4	2.7	7.2	97.3
LBW	1.3	1.4	0.4	1.0	1.7	99.0

*Maximum % Retained must be above the 3/8" sieve.
 *Any two adjacent sieves must equal 10% except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 4% for each sieve except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 8% for the 1" sieve when a 2" max. size (nom. Max. 1.5") aggregate is used.

Production Gradation Batch Plant Gradations Aggregate Supplier Gradations

Coarseness Factor: **66** **Workability Factor:** **34**

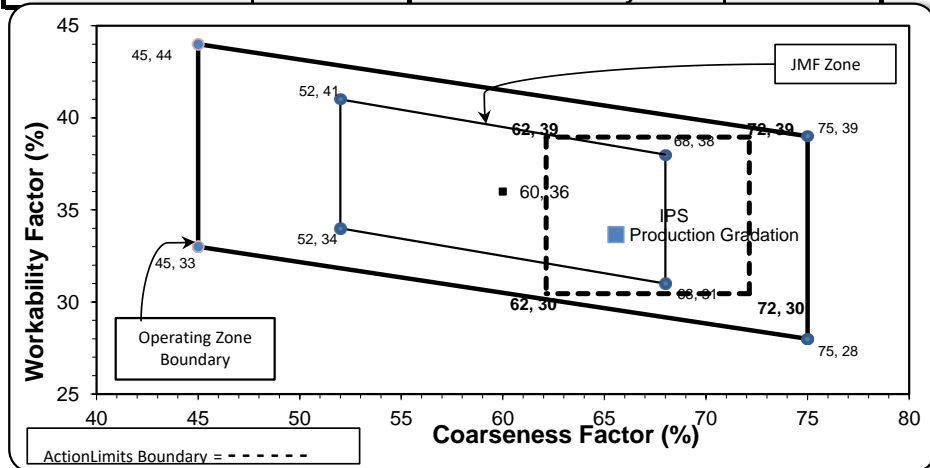

Initial Production Sample (IPS)

Coarseness Factor: **67**
Workability Factor: **35**

Sieve	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	0.0	0.0
1.5"	100.0	0.0	0.0
1"	86.9	13.1	13.1
3/4"	76.1	10.8	23.9
1/2"	63.7	12.4	36.3
3/8"	56.2	7.5	43.8
#4	43.2	13.0	56.8
#8	34.7	8.5	65.3
#16	27.5	7.2	72.5
#30	20.6	7.0	79.4
#50	9.0	11.6	91.0
#100	2.1	6.9	97.9
LBW	1.0	1.1	99.0

PREPARED BY:
 SM, LLC Technical Service

Approved By:

Aggregate Optimization Chart

PLANT #: **P-36**

Sample Date: 9/18/23

Concrete Grade: **P1M, 3500HP**

Dates Test Represents: 9/19/2023 through 9/25/2023

Contractor: _____

MDOT No.: _____

Agg. Class	Pit #	Source	Weight (SSD)	ft ³	Specific Gravity	% Contribution
CA	71-47	Presque Isle	870	5.32	2.62	28.3
IA	71-47	Presque Isle	1000	6.12	2.62	32.6
2NS	63-92	Grange Hall	1200	7.26	2.65	39.1
Total Wt			3070	18.70		100.0

<----- Verify this number is 100%




Superior Materials, LLC
 30701 W. 10 Mile Rd.
 Suite 500
 Farmington Hills, MI 48336

Sieve	CA	IA	2NS	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	100.0	100.0	100.0	0.0	0.0
1.5"	92.8	100.0	100.0	98.0	2.0	2.0
1"	41.0	100.0	100.0	83.3	14.7	16.7
3/4"	8.9	98.0	100.0	73.5	9.7	26.5
1/2"	2.3	74.8	100.0	64.1	9.4	35.9
3/8"	2.2	49.8	100.0	55.9	8.2	44.1
#4	2.1	11.0	97.2	42.2	13.8	57.8
#8	2.0	3.7	82.6	34.1	8.1	65.9
#16	1.9	3.1	67.9	28.1	6.0	71.9
#30	1.8	3.0	49.3	20.8	7.3	79.2
#50	1.8	2.9	20.4	9.4	11.3	90.6
#100	1.6	2.8	3.4	2.7	6.7	97.3
LBW	1.2	2.4	0.8	1.4	1.3	98.6

*Maximum % Retained must be above the 3/8" sieve.
 *Any two adjacent sieves must equal 10% except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 4% for each sieve except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 8% for the 1" sieve when a 2" max. size (nom. Max. 1.5") aggregate is used.

Production Gradation Batch Plant Gradations Aggregate Supplier Gradations

Coarseness Factor: **67** **Workability Factor:** **34**

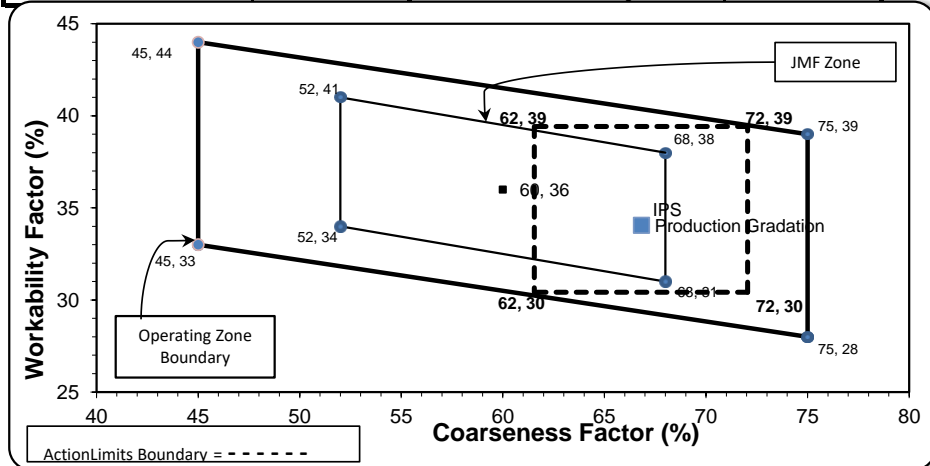

Initial Production Sample (IPS)

Coarseness Factor: **67**
Workability Factor: **35**

Sieve	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	0.0	0.0
1.5"	100.0	0.0	0.0
1"	85.0	15.0	15.0
3/4"	72.1	12.9	27.9
1/2"	64.5	7.6	35.5
3/8"	56.5	8.0	43.5
#4	42.7	13.8	57.3
#8	34.9	7.8	65.1
#16	29.0	5.9	71.0
#30	21.0	8.0	79.0
#50	8.2	12.8	91.8
#100	1.6	6.5	98.4
LBW	0.7	0.9	99.3

PREPARED BY:
 SM, LLC Technical Service

Approved By:

Aggregate Optimization Chart

PLANT #: **P-39**

Sample Date: 9/18/23

Concrete Grade: **P1M, 3500HP**

Dates Test Represents: 9/19/2023 through 9/25/2023

Contractor: _____

MDOT No.: _____

Agg. Class	Pit #	Source	Weight (SSD)	ft ³	Specific Gravity	% Contribution
CA	71-47	Presque Isle	1020	6.24	2.62	33.2
IA	71-47	Presque Isle	800	4.89	2.62	26.1
2NS	44-051	Krake Willis Rd	1250	7.56	2.65	40.7
Total Wt			3070	18.69		100.0

<----- Verify this number is 100%




Superior Materials, LLC
 30701 W. 10 Mile Rd.
 Suite 500
 Farmington Hills, MI 48336

Sieve	CA	IA	2NS	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	100.0	100.0	100.0	0.0	0.0
1.5"	94.8	100.0	100.0	98.3	1.7	1.7
1"	34.4	100.0	100.0	78.2	20.1	21.8
3/4"	10.8	98.5	100.0	70.0	8.2	30.0
1/2"	3.9	83.2	100.0	63.7	6.3	36.3
3/8"	3.4	63.7	100.0	58.4	5.2	41.6
#4	3.0	17.3	98.9	45.8	12.7	54.2
#8	2.8	4.5	84.6	36.5	9.2	63.5
#16	2.7	2.7	68.9	29.7	6.9	70.3
#30	2.6	2.3	49.7	21.7	8.0	78.3
#50	2.5	2.1	23.8	11.1	10.6	88.9
#100	2.2	1.9	6.5	3.9	7.2	96.1
LBW	1.8	1.7	1.6	1.7	2.2	98.3

*Maximum % Retained must be above the 3/8" sieve.
 *Any two adjacent sieves must equal 10% except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 4% for each sieve except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 8% for the 1" sieve when a 2" max. size (nom. Max. 1.5") aggregate is used.

Production Gradation Batch Plant Gradations Aggregate Supplier Gradations

Coarseness Factor: **65** **Workability Factor:** **37**

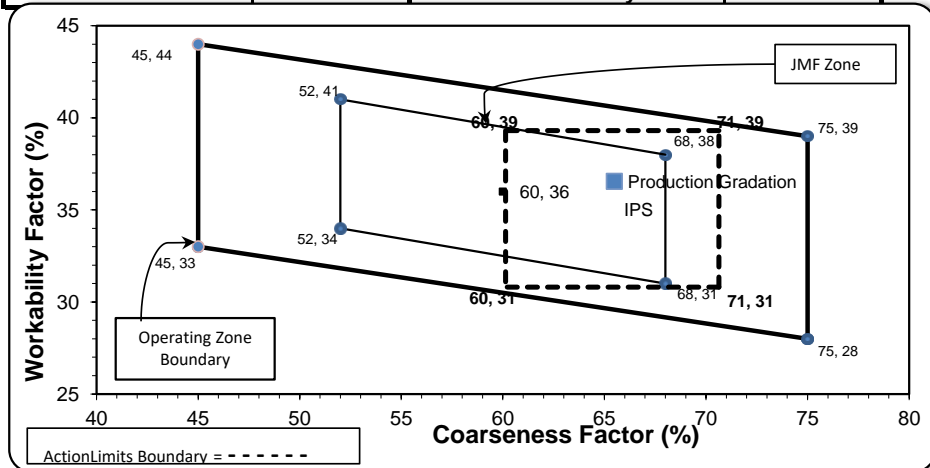

Initial Production Sample (IPS)

Coarseness Factor:		65	
Workability Factor:		35	
Sieve	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	0.0	0.0
1.5"	99.6	0.4	0.4
1"	83.9	15.7	16.1
3/4"	74.1	9.8	25.9
1/2"	64.3	9.7	35.7
3/8"	57.5	6.8	42.5
#4	44.5	13.1	55.5
#8	35.1	9.4	64.9
#16	27.9	7.2	72.1
#30	21.7	6.2	78.3
#50	12.6	9.1	87.4
#100	3.5	9.1	96.5
LBW	1.2	2.4	98.8

PREPARED BY:
 SM, LLC Technical Service

Approved By:

Aggregate Optimization Chart

PLANT #: **P-02**

Sample Date: 9/18/23

Concrete Grade: **P1M, 3500HP**

Dates Test Represents: 9/19/2023 through 9/25/2023

Contractor: _____

MDOT No.: _____

Agg. Class	Pit #	Source	Weight (SSD)	ft ³	Specific Gravity	% Contribution
CA	71-47	Presque Isle	870	5.32	2.62	28.3
IA	71-47	Presque Isle	1000	6.12	2.62	32.6
2NS	63-115	Ray Rd	1200	7.26	2.65	39.1
Total Wt			3070	18.70		100.0

<----- Verify this number is 100%




Superior Materials, LLC
 30701 W. 10 Mile Rd.
 Suite 500
 Farmington Hills, MI 48336

Sieve	CA	IA	2NS	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	100.0	100.0	100.0	0.0	0.0
1.5"	92.8	100.0	100.0	98.0	2.0	2.0
1"	41.0	100.0	100.0	83.3	14.7	16.7
3/4"	8.9	98.0	100.0	73.5	9.7	26.5
1/2"	2.3	74.8	100.0	64.1	9.4	35.9
3/8"	2.2	49.8	100.0	55.9	8.2	44.1
#4	2.1	11.0	96.0	41.7	14.2	58.3
#8	2.0	3.7	80.9	33.4	8.3	66.6
#16	1.9	3.1	65.9	27.3	6.1	72.7
#30	1.8	3.0	49.5	20.8	6.5	79.2
#50	1.8	2.9	25.5	11.4	9.4	88.6
#100	1.6	2.8	5.4	3.5	7.9	96.5
LBW	1.2	2.4	0.6	1.4	2.1	98.6

*Maximum % Retained must be above the 3/8" sieve.
 *Any two adjacent sieves must equal 10% except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 4% for each sieve except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 8% for the 1" sieve when a 2" max. size (nom. Max. 1.5") aggregate is used.

Production Gradation Batch Plant Gradations Aggregate Supplier Gradations

Coarseness Factor:	66	Workability Factor:	33
---------------------------	-----------	----------------------------	-----------

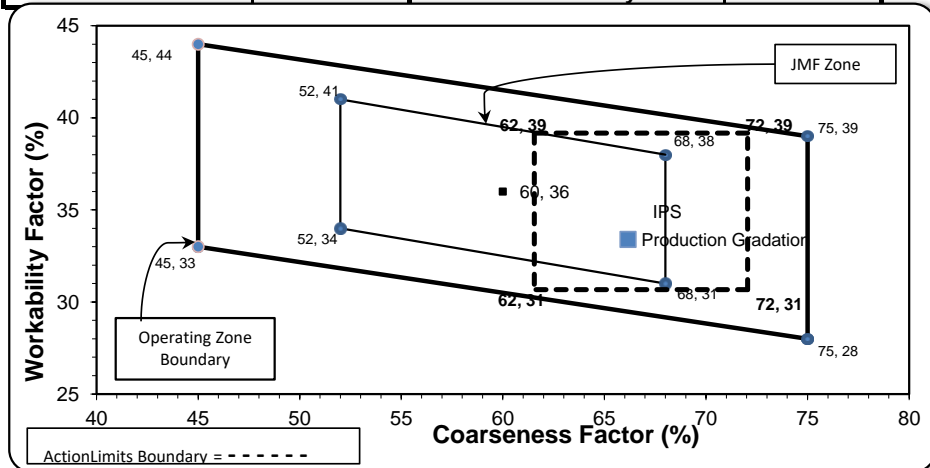

Initial Production Sample (IPS)

Coarseness Factor:	67		
Workability Factor:	35		
Sieve	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	0.0	0.0
1.5"	100.0	0.0	0.0
1"	85.0	15.0	15.0
3/4"	72.3	12.7	27.7
1/2"	64.5	7.8	35.5
3/8"	56.5	8.0	43.5
#4	42.7	13.8	57.3
#8	34.9	7.8	65.1
#16	29.0	5.9	71.0
#30	21.0	8.0	79.0
#50	8.2	12.8	91.8
#100	1.6	6.5	98.4
LBW	0.7	0.9	99.3

PREPARED BY:
 SM, LLC Technical Service

Approved By: