

Aggregate Optimization Chart

PLANT #: p11

Contractor: _____

Sample Date: 3/24/25

Concrete Grade: DM, 4500HP

Dates Test Represents: 3/25/2025 through 3/31/2025

MDOT No.: _____

Agg. Class	Pit #	Source	Weight (SSD)	ft ³	Specific Gravity	% Contribution
6AA	71-47	Presque Isle	1350	8.26	2.62	46.5
26A	71-47	Presque Isle	405	2.48	2.62	13.9
2NS	63-115	Ray Rd	1150	6.95	2.65	39.6
Total Wt			2905	17.69		100.0

<----- Verify this number is 100%



Superior Materials, LLC
 30701 W. 10 Mile Rd.
 Suite 500
 Farmington Hills, MI 48336


Sieve	6AA	26A	2NS	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	100.0	100.0	100.0	0.0	0.0
1.5"	100.0	100.0	100.0	100.0	0.0	0.0
1"	97.9	100.0	100.0	99.0	1.0	1.0
3/4"	80.0	100.0	100.0	90.7	8.3	9.3
1/2"	31.0	94.9	100.0	67.2	23.5	32.8
3/8"	15.7	78.7	100.0	57.9	9.4	42.1
#4	2.3	14.6	98.4	42.1	15.8	57.9
#8	1.4	4.4	81.0	33.3	8.7	66.7
#16	1.2	2.9	66.0	27.1	6.2	72.9
#30	1.2	2.5	50.1	20.7	6.4	79.3
#50	1.2	2.4	25.0	10.8	10.0	89.2
#100	1.1	2.3	4.6	2.7	8.1	97.3
LBW	0.9	2.0	1.2	1.2	1.5	98.8

*Maximum % Retained must be above the 3/8" sieve.
 *Any two adjacent sieves must equal 10% except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 4% for each sieve except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 4% for the 3/4" sieve when a 1.5" max. size (nom. Max. 1.0") aggregate is used.

Production Gradation Batch Plant Gradations Aggregate Supplier Gradations

Adjusted WF Initial Production Sample (IPS)

Coarseness Factor: 63	Workability Factor: 33	Adjusted WF 35.8	Coarseness Factor: 62
------------------------------	-------------------------------	-------------------------	------------------------------

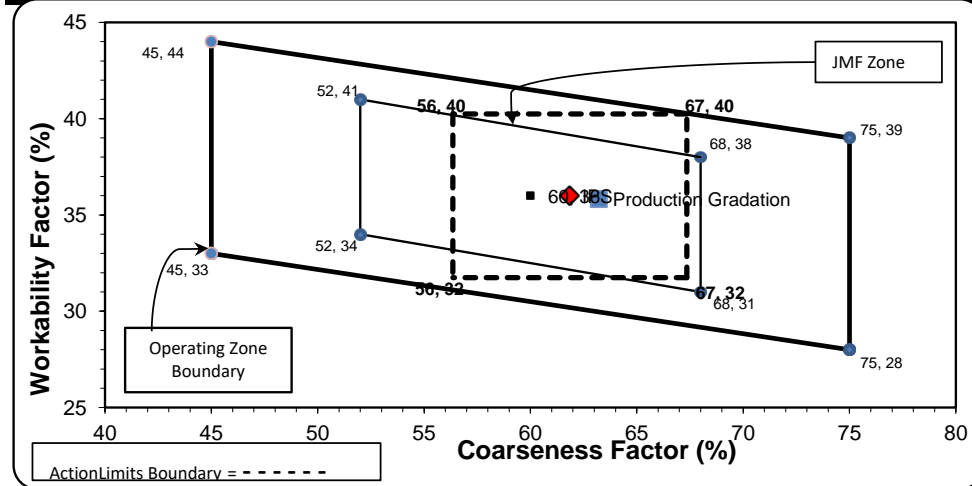

Sieve	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	0.0	0.0
1.5"	100.0	0.0	0.0
1"	100.0	0.0	0.0
3/4"	95.0	5.0	5.0
1/2"	72.3	22.8	27.7
3/8"	60.4	11.8	39.6
#4	42.6	17.8	57.4
#8	36.0	6.6	64.0
#16	29.5	6.5	70.5
#30	20.3	9.2	79.7
#50	9.5	10.8	90.5
#100	3.4	6.1	96.6
LBW	1.3	2.1	98.7

PREPARED BY:
 SM, LLC Technical Service

Approved By:

Aggregate Optimization Chart

Production Gradation Report

PLANT #: **P-02**

Sample Date: 3/24/25

Concrete Grade: DM, 4500HP

Contractor: _____

Dates Test Represents: 3/25/2025 through 3/31/2025

MDOT No.: _____

Agg. Class	Pit #	Source	Weight (SSD)	ft ³	Specific Gravity	% Contribution
6AA	71-47	Presque Isle	1350	8.26	2.62	46.5
26A	71-47	Presque Isle	405	2.48	2.62	13.9
2NS	63-115	Ray Rd	1150	6.95	2.65	39.6
Total Wt			2905	17.69		100.0

<----- Verify this number is 100%



Superior Materials, LLC
 30701 W. 10 Mile Rd.
 Suite 500
 Farmington Hills, MI 48336


Sieve	6AA	26A	2NS	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	100.0	100.0	100.0	0.0	0.0
1.5"	100.0	100.0	100.0	100.0	0.0	0.0
1"	97.9	100.0	100.0	99.0	1.0	1.0
3/4"	80.0	100.0	100.0	90.7	8.3	9.3
1/2"	31.0	94.9	100.0	67.2	23.5	32.8
3/8"	15.7	78.7	100.0	57.9	9.4	42.1
#4	2.3	14.6	98.4	42.1	15.8	57.9
#8	1.4	4.4	81.0	33.3	8.7	66.7
#16	1.2	2.9	66.0	27.1	6.2	72.9
#30	1.2	2.5	50.1	20.7	6.4	79.3
#50	1.2	2.4	25.0	10.8	10.0	89.2
#100	1.1	2.3	4.6	2.7	8.1	97.3
LBW	0.9	2.0	1.2	1.2	1.5	98.8

*Maximum % Retained must be above the 3/8" sieve.
 *Any two adjacent sieves must equal 10% except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 4% for each sieve except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 4% for the 3/4" sieve when a 1.5" max. size (nom. Max. 1.0") aggregate is used.

Production Gradation Batch Plant Gradations Aggregate Supplier Gradations Adjusted WF Initial Production Sample (IPS)

Coarseness Factor:	63	Workability Factor:	33	35.8
---------------------------	-----------	----------------------------	-----------	-------------

Coarseness Factor:	63
Workability Factor:	35

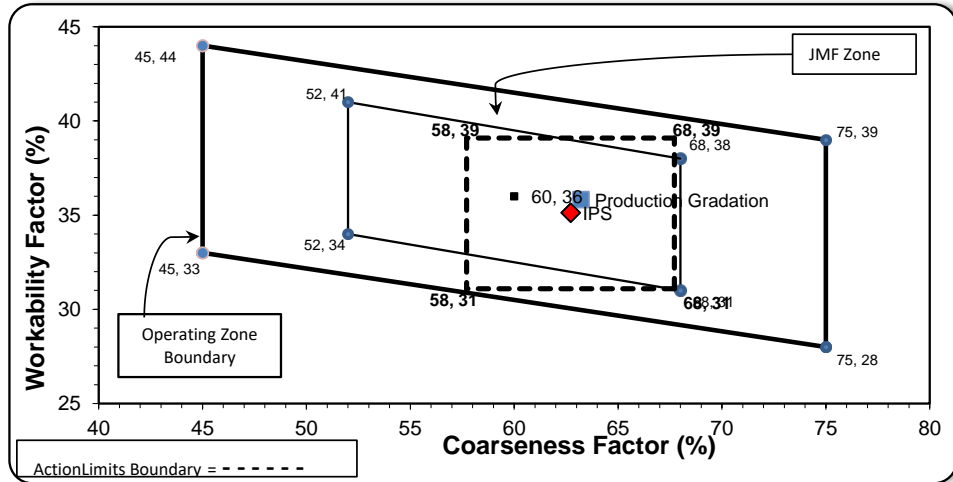

Sieve	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	0.0	0.0
1.5"	100.0	0.0	0.0
1"	100.0	0.0	0.0
3/4"	95.1	4.9	4.9
1/2"	74.6	20.5	25.4
3/8"	59.3	15.3	40.7
#4	42.1	17.2	57.9
#8	35.1	7.1	64.9
#16	29.2	5.9	70.8
#30	21.9	7.3	78.1
#50	9.6	12.4	90.4
#100	2.4	7.2	97.6
LBW	0.9	1.5	99.1

PREPARED BY:
 SM, LLC Technical Service

Approved By: