

Aggregate Optimization Chart

PLANT #: p11

Contractor: _____

Sample Date: 3/3/25

Concrete Grade: DM, 4500HP

Dates Test Represents: 3/4/2025 through 3/10/2025

MDOT No.: _____

Agg. Class	Pit #	Source	Weight (SSD)	ft ³	Specific Gravity	% Contribution
6AA	71-47	Presque Isle	1350	8.26	2.62	46.5
26A	71-47	Presque Isle	405	2.48	2.62	13.9
2NS	63-115	Ray Rd	1150	6.95	2.65	39.6
Total Wt			2905	17.69		100.0

<----- Verify this number is 100%



Superior Materials, LLC
 30701 W. 10 Mile Rd.
 Suite 500
 Farmington Hills, MI 48336

Sieve	6AA	26A	2NS	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	100.0	100.0	100.0	0.0	0.0
1.5"	100.0	100.0	100.0	100.0	0.0	0.0
1"	98.7	100.0	100.0	99.4	0.6	0.6
3/4"	86.0	100.0	100.0	93.5	5.9	6.5
1/2"	48.5	95.6	100.0	75.5	18.0	24.5
3/8"	29.7	82.0	100.0	64.8	10.6	35.2
#4	5.0	16.6	95.3	42.4	22.5	57.6
#8	2.8	5.7	79.3	33.5	8.9	66.5
#16	2.5	4.0	64.2	27.1	6.4	72.9
#30	2.4	3.6	49.0	21.0	6.1	79.0
#50	2.2	3.3	25.3	11.5	9.5	88.5
#100	2.1	3.0	6.1	3.8	7.7	96.2
LBW	1.8	2.6	1.3	1.7	2.1	98.3

*Maximum % Retained must be above the 3/8" sieve.
 *Any two adjacent sieves must equal 10% except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 4% for each sieve except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 4% for the 3/4" sieve when a 1.5" max. size (nom. Max. 1.0") aggregate is used.


Production Gradation Batch Plant Gradations Aggregate Supplier Gradations

Adjusted WF Initial Production Sample (IPS)

Coarseness Factor:	53	Workability Factor:	33
---------------------------	-----------	----------------------------	-----------

Coarseness Factor:	62
---------------------------	-----------

Workability Factor:	36
----------------------------	-----------

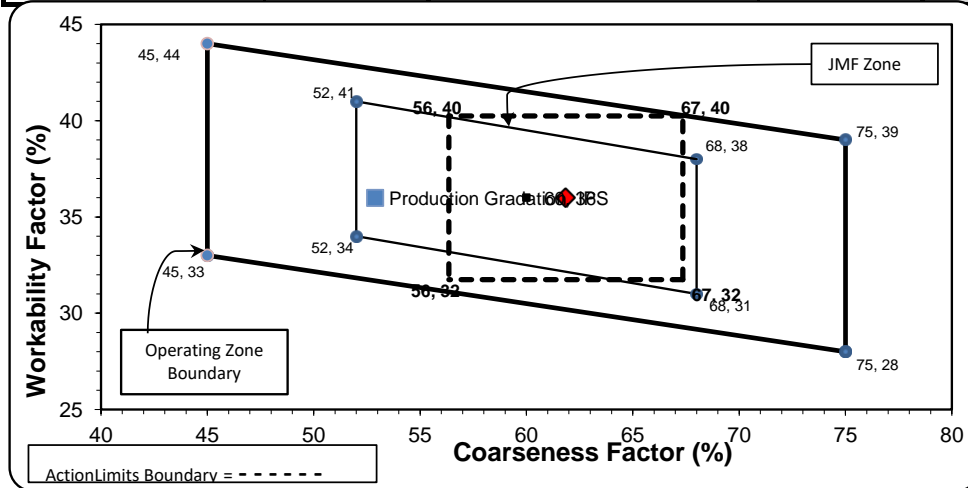

Sieve	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	0.0	0.0
1.5"	100.0	0.0	0.0
1"	100.0	0.0	0.0
3/4"	95.0	5.0	5.0
1/2"	72.3	22.8	27.7
3/8"	60.4	11.8	39.6
#4	42.6	17.8	57.4
#8	36.0	6.6	64.0
#16	29.5	6.5	70.5
#30	20.3	9.2	79.7
#50	9.5	10.8	90.5
#100	3.4	6.1	96.6
LBW	1.3	2.1	98.7

PREPARED BY:
 SM, LLC Technical Service

Approved By:

Daily Summary Report

Date Wednesday, March 5, 2025

	Sample Id -674916896	-674907577	-674978231
Plant	S000 Superior Onsite	S000 Superior Onsite	S000 Superior Onsite
Product	1051 6AA LS	1067 26A Mod LS	1022 2NS GR
Specification		26A Mod LS Spec	2NS GR Spec
Sample Type	QA	QA	QA
2" (50mm)	100.0	100.0	
1 1/2" (37.5mm)	100.0	100.0	
1" (25mm)	98.7	100.0	
3/4" (19mm)	86.0	100.0	
1/2" (12.5mm)	48.5	95.6	
3/8" (9.5mm)	29.7	82.0	100.0
#4 (4.75mm)	5.0	16.6	95.3
#8 (2.36mm)	2.8	5.7	79.3
#16 (1.18mm)	2.5	4.0	64.2
#30 (.6mm)	2.4	3.6	49.0
#50 (.3mm)	2.2	3.3	25.3
#100 (.15mm)	2.1	3.0	6.1
#200 (75µm)	1.92	2.7	1.5
Pan	0.00	0.0	0.0
FM			2.81
-#200 (75um)			1.5
Wash Loss (#200/75um)	1.8	2.6	1.3
Total Moisture	3.6	3.7	2.6